



CHICAGO APPROVED

Emergency Fixtures



CHICAGO APPROVED

LED EdgeLit Exit Signs
RECESSED MOUNT



CHICAGO APPROVED

Steel LED Exit & Emergency Combo



CHICAGO APPROVED

LED EdgeLit EXIT Signs
SURFACE MOUNT



CHICAGO APPROVED

Steel LED Emergency Lighting



CHICAGO APPROVED

LED EXIT Sign

CASEY ELECTRIC SALES
800-323-6696
CaseySales.com

LIFESAFETY LIGHTING
FOUR NESHAMINY INTERPLEX DRIVE, SUITE 107
TREVOSSE, PA 19053

Chicago Approved

LSLEDCADXR

Chicago Approved Steel LED Emergency Lighting

STANDARD



ILLUMINATION

- Two, 6V 5.3W adjustable white LED lamp heads.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- Internal solid-state transfer switch automatically connects the internal battery to the LED lamp heads for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 10W standard on 20W models.

MOUNTING

- Knockouts on the back for wall mount.
- Side and top knockouts for conduit feed applications.


HOUSING

- Durable 20-gauge steel construction.
- Neutral white or black finish.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for two years.
- UL listed for damp locations (20° – 50°C).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

DIMENSIONS

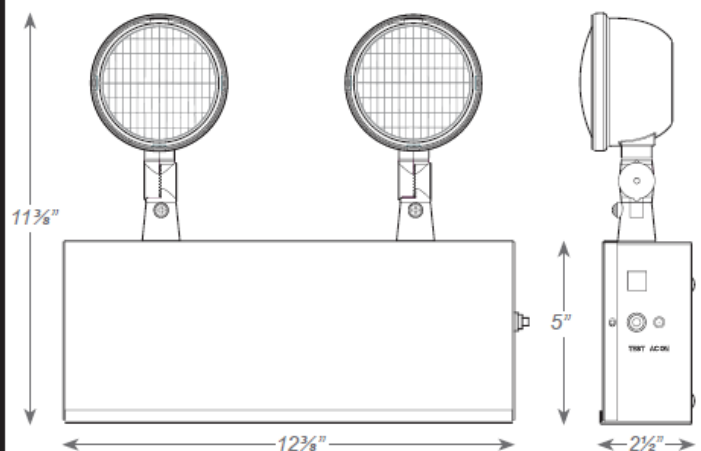

ORDERING INFORMATION

Sample Part Number: **LSLEDCADXR-10**

MODEL	HOUSING COLOR		WATTAGE	
LSLEDCADXR	BLANK	White	10	10 Watts
	B	Black	20	20 Watts (10 watt remote)

Chicago Approved



JOB NAME: _____

TYPE: _____

PART #: _____

NOTES: _____

LSLEDCADXR

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
LEDCADXR	8.4	9.4	0.08A	0.04A
LEDCADXR-RC	8.7	10.0	0.09A	0.05A

	MAXIMUM WATTAGE ALLOWED
LEDCADXR-10	10

REMOTE LAMP CAPABILITY

Reference remote lamp head specification sheets for complete catalog number ordering information.

REMOTE HEAD FAMILY	TOTAL WATTAGE
SRHLED-1	5.3
RH16-1	5.0
RH16-2	10.0
RHR-1 (5.4 watt)	5.4
RHR-1 (7.0 watt)	7.0
RHR-1 (9.0 watt)	9.0
RH-1 (5.4 watt)	5.4
RH-1 (7.0 watt)	7.0
RH-1 (9.0 watt)	9.0
RH1-WP (5.4 watt)	5.4
RH1-WP (7.2 watt)	7.2
RH1-WP (9.0 watt)	9.0
RHLED-1-16-MV	3.3
RHLED-2-16-MV	6.6

NOTE: Voltages of the remote lamp head must match the voltage of the individual unit. Reference individual remote lamp head specification sheets for voltage compatibility.

Chicago Approved



LSCAELXTE: CHICAGO APPROVED LED EDGELIT EXIT SIGNS – SURFACE MOUNT

Illumination

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- UV stabilized, silk screened acrylic panels provide consistent, uniform illumination.
- Single or double face configurations.

Electrical

- Dual 120V/277V.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- Long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Die-cast aluminum mounting canopy provided for universal top, end or back mount.

Housing

- Premium-grade, extruded aluminum housing.

Warranty

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.

Ordering information

Model	Face #	Letter/Background Color	Housing Color
LSCAELXTEU	1 Single	RW Red on white	A Aluminum
	2 Double		W White

Notes:

1. Available in single face configuration only.
2. Available in double face configuration only.

JOB NAME: _____

TYPE: _____

PART #: _____


NOTES: _____



Listing

- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

Dimensions

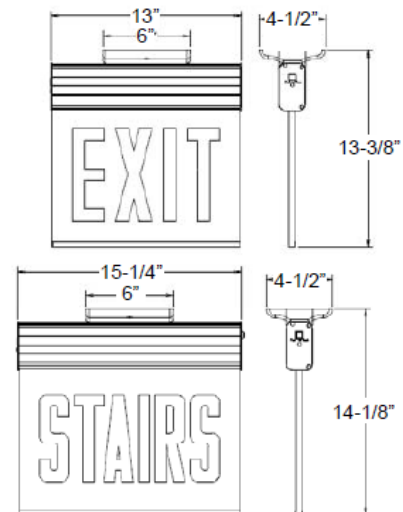

Electrical information

	Supply Voltage	Max. Watts	Max Amps
AC models	120V	4.3W	0.04A
AC models	277V	4.7W	0.02A
EM models	120V	4.5W	0.04A
EM models	277V	4.9W	0.02A

Signage/Directional Arrows

NA	EXIT, no arrow
SWNA	STAIRS, no arrow
DA	EXIT, double arrow
SWDA	STAIRS, double arrow
RA ¹	EXIT, right arrow
SWRA ¹	STAIRS, right arrow
LA ¹	EXIT, left arrow
SWLA ¹	STAIRS, left arrow
LARA ²	EXIT, left/right arrow
SWLARA ²	STAIRS, left/right arrow

Chicago Approved



LSCALEDXTEU

Chicago Approved Steel LED Exit & Emergency Combo
STANDARD



ILLUMINATION

- Long lasting, energy efficient white LED exit sign illumination.
- Single or double face configuration.
- Two 6V 5.3W adjustable white LED lamp heads.

ELECTRICAL

- Dual 120/277 voltage standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 120 minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity 10W available.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Durable 20-gauge steel construction.
- Neutral white or black finish.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations (20°C – 50°C).

JOB NAME: _____


TYPE: _____

PART #: _____

NOTES: _____



DIMENSIONS

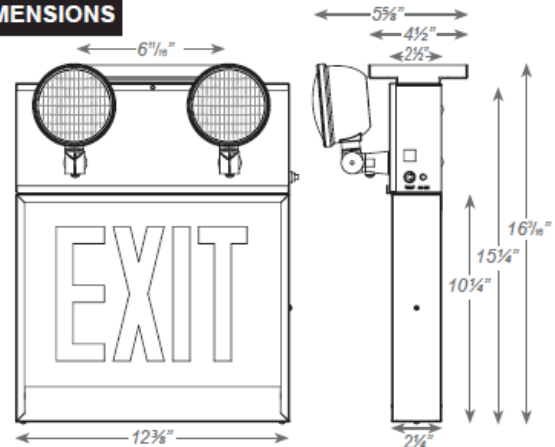

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
LSCALEDXTEU	12	13	0.12A	0.06A
LSCALEDXTEU-RC	12	13	0.12A	0.06A

ORDERING INFORMATION

Sample Part Number: **LSCALEDXTEU-1-R-W**

MODEL	No. of FACES	LETTER	HOUSING	OPTIONS	SIGNAGE	DIRECTIONAL ARROW		
LSCALEDXTEU	1 Single Face	R Red	W White	RC Remote Capacity	BLANK Exit	NA Exit No Arrow	SWLA ¹ Stairs Left Arrow	
	2 Double Face		B Black		SW Stairs	DA Exit Double Arrow	SWNA Stairs No Arrow	
						RA ¹ Exit Right Arrow	SWDA Stairs Double Arrow	
						LA ¹ Exit Left Arrow	SWRA ¹ Stairs Right Arrow	
						LARA ² Exit Left/Right Arrow	SWLARA ¹ Stairs Left/Right Arrow	

Notes:

1. Available only with single face units.
2. Available only with double face units.

Chicago Approved



JOB NAME: _____

TYPE: _____

PART #: _____

NOTES: _____

LSCARELZXTE CHICAGO APPROVED LED EDGELIT EXIT SIGNS — RECESSED MOUNT

Illumination

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- UV stabilized, silk screened acrylic panels provide consistent, uniform illumination.
- Single or double face configurations.

Electrical

- Dual 120V/277V.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- Long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- Drywall or drop-thru ceiling mount with hanger bars.

Housing

- Premium-grade, extruded aluminum housing.
- Housing is easily detachable from below, providing accessibility for service or maintenance.

Ordering information

Model	Face #	Letter/Background Color	Housing Color	Battery	Signage/Directional Arrows
LSCARELZXTE	1 Single	RW Red on white	A Aluminum W White	Blank AC only	NA EXIT, no arrow
	2 Double			EM Ni-Cd battery	SWNA STAIRS, no arrow
					DA EXIT, double arrow
					SWDA STAIRS, double arrow
					RA ¹ EXIT, right arrow
					SWRA ¹ STAIRS, right arrow
					LA ¹ EXIT, left arrow
					SWLA ¹ STAIRS, left arrow
					LARA ² EXIT, left/right arrow
					SWLARA ² STAIRS, left/right arrow

Notes:


1. Available in single face configuration only.
2. Available in double face configuration only.



Warranty/Listing

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

Dimensions

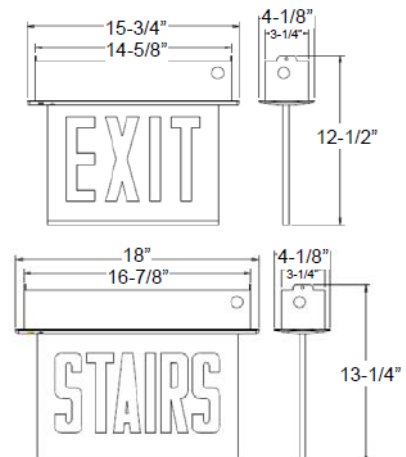

Electrical information

	Supply Voltage	Max. Watts	Max Amps
AC models	120V	4.3W	0.04A
AC models	277V	4.7W	0.02A
EM models	120V	4.5W	0.04A
EM models	277V	4.9W	0.02A

Chicago Approved



LSCAXTE

CHICAGO APPROVED
APPROVED LED EXIT SIGN

ILLUMINATION

- Ultra-bright, energy efficient, long-lasting white LEDs provide uni-form illumination
- Single or double face configurations.

ELECTRICAL

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Long-life, maintenance-free, rechargeable NiCad battery (EM model)
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING

- Side and back KO's provided for mounting convenience.
- Anopy provided for universal (top, side or back) mounting.

HOUSING

- 20-gauge steel housing.
- Neutral white finish.

JOB NAME: _____
TYPE: _____
PART #: _____
NOTES: _____




WARRANTY & LISTINGS

- Five Year Warranty on all electronics and housing. Batteries are pro-rated warranted for 5 years.
- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.



DIMENSIONS

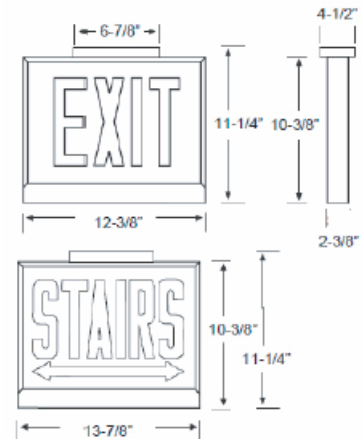

Electrical Information

	Supply Voltage	Max. Watts	Max Amps
All models	120V/277V	5.0W	.10A/.05A

ORDERING INFORMATION

Sample Part Number: **LSCAXTEU-2-R-W-EM-DA**

MODEL	# OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	SIGNAGE/DIRECTIONAL ARROWS
LSCAXTEU	1 - SINGLE FACE 2 - DOUBLE FACE	R - RED	W - WHITE B - BLACK	BLANK - AC ONLY EM - NICAD BATTERY	NA - EXIT, no arrow SWNA - STAIRS, no arrow DA - EXIT, double arrow SWDA - STAIRS, double arrow RA ¹ - EXIT, right arrow SWRA ¹ - STAIRS, right arrow LA ¹ - EXIT, left arrow SWLA ¹ - STAIRS, left arrow LARA ² - EXIT, left/right arrow SWLARA ² - STAIRS, left/right arrow

NOTE: Product specifications subject to change without notice. Updated 08.2017

Notes:
1. Available in single face configuration only.
2. Available in double face configuration only.

CASEY ELECTRIC SALES
800-323-6696
CaseySales.com

LIFESAFETY LIGHTING
FOUR NESHAMINY INTERPLEX DRIVE, SUITE 107
TREVOS, PA 19053